




Superior Engineering Design & Sensational Image Quality

AA-4533P-FSR2 IR Dome Camera

Features :

- Indoor IR Dome CCTV Camera
- 1/3" Sony Super HAD II CCD
- Super 450TV Lines Resolution
- High Intensity 24pcs IR LED Night Vision up to 20M
- 0 Lux Image Capturing at IR ON
- 3.6MM M12 IR Corrected Lens (Optional 6.0 MM)
- BLC, AES Auto Enabled
- Gain Control Auto Enabled
- ATW Auto Enabled
- Free Rotation Indoor Plastic Dome Housing
- Supports 12V DC \pm 10% Power range with Low Power Consumption

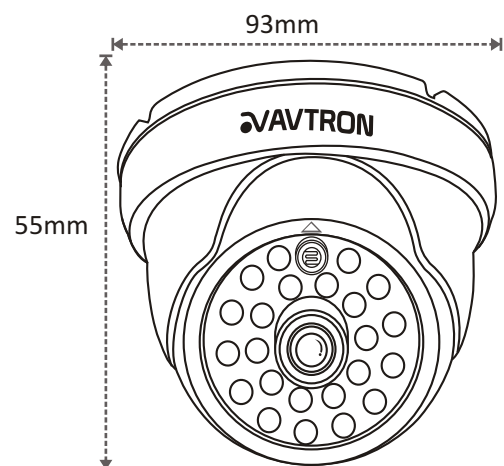

Specifications :

Model	AA-4533P-FSR2	AA-4533N-FSR2
Signal System	PAL	NTSC
CCD Type	1/3" Sony Super HAD II CCD	
Scanning Frequency	PAL - H : 15.625 KHz V : 50 Hz	NTSC - H : 15.734 KHz V : 60 Hz
Effective Pixels	PAL -500(H) * 582(V)	NTSC - 510(H) * 494(V)
Horizontal Line Resolution	450 TVL	
Scanning Type	2:1 Interlace	
S/N Ratio	more than 48dB	
Electronic Shutter	AES:1/50s-1/100,000s	AES: 1/60s-1/100,000s
Lens Type	3.6MM M12 Lens	
Lux Level(illumination)	0.5 Lux @ F 1.2 , 0 Lux with IR LED ON	
IR LED	24Pcs IR LED, 0.5ø	
IR Wave Length	850~880nm Infrared	
IR Vision	20M	
Gamma characteristics	0.45 Default	
Gain Control	Auto Adjusted according to Lux Level (15dB to 30dB)	
White Balance	ATW	
Back Light Compensation	Auto	
Synchronous System	Internal Synchronization	
Video output	1.0Vp-p,75Ω, BNC Cable Connector	
Power Supply	DC 12V ± 10%, DC Cable Connector	
Power Consumption	<260mA @ 12VDC	
Operating Temperature	-10°C ~ + 50°C	
Dimensions(W×D×H)	93mm (W) x 55mm (H)	
Weight (g)	158 g	
Enclosure	Plastic Dome Housing	

* Product specifications and appearance may be changed without prior notice due to improvements.



Scan with your
Smart phone for
more information

AVTRON

<http://www.asi.ind.in>