


High Resolution High Range VF Array Bullet Camera with OSD



Main Features

- ⇒ 1 / 3" SONY SUPER HAD II CCD
- ⇒ High Resolution of 600 TVL
- ⇒ 3 Units of Dot Matrix Array LED
- ⇒ Array Range of 50 meters
- ⇒ 9~22mm Manual iris Lens
- ⇒ With OSD, D-WDR

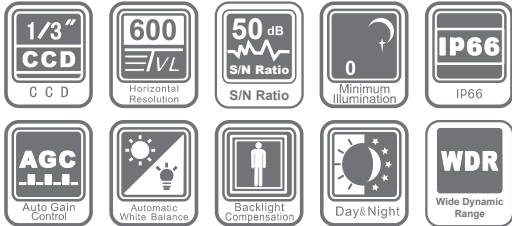

| Feature | Specification |
|-------------------------|---|
| Image Sensor | 1 / 3" SONY SUPER HAD II CCD |
| Pixels | PAL: 752 (H) ×582 (V) ; NTSC: 768 (H) ×494 (V) |
| Resolution | 600TVL |
| Min. Illumination | COLOR :0.3Lux(F1.2,50IRE,AGC ON); B/W :0.005Lux(F1.2,50IRE,AGC ON) |
| S/N Ratio | More than 50dB (AGC OFF) |
| Electronic Shutter | PAL:1/50~1/100000s; NTSC:1/60~1/100000s |
| Iris Control | Manual Iris |
| Lens | 9-22MM manual lens |
| White Balance (AWB) | ATW1/ATW2/AWC / MANUAL |
| Gain Control (AGC) | Low/Milddle/High choice |
| Back Light Compensation | on/off |
| Day & Night (ICR) | Auto/Color/B/W/External Control |
| IR | 3 units of Dot matrix Array LED |
| WDR | Digital WDR |
| Protocol | Pelco-D / Pelco-P/NEXTCHIP protocol |
| Sync | Power Synchronization / Internal Synchronization |
| Video Output | BNC Mode: twisted-pair method (built-in twisted pair transmission module) |
| Special Functions | OSD, Privacy Masking, Motion Detection |
| Power Supply | DC12V |
| Power Consumption | 2.5W |
| IP Rating | IP66 |
| Dimensions | 260 x 185 x 100mm |
| Operating Temperature | '-20°C - +50°C |
| Weight | 1500g |
| Certifications | CE, FCC & ROHS |