


## High Resolution Vandal Resistant VF WDR IR Dome Camera with OSD



### Main Features

- ⇒ 1/3" Sony Super HAD II
- ⇒ 700 TVL High Resolution Camera
- ⇒ 0 lux @ F1.2 (IR ON)
- ⇒ 4~9 mm Vari-Focal Auto Iris Lens
- ⇒ IR Range of 30 Mtrs with 30 LEDs
- ⇒ AGC, AES, BLC, HLC, Mirror, Privacy Masking and Motion Detection
- ⇒ Sens Up, WDR, 2D-DNR, 3D-DNR, LSC, DIS and Eclipse
- ⇒ CE, FCC and RoHS Certified

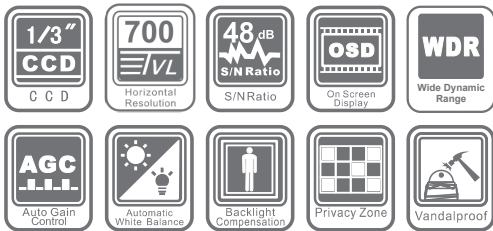

Feature	Specification
Image Sensor	1/3" Sony Super HAD II
Pixels	PAL:752Hx582V, NTSC:768Hx494V
Resolution	700 TVL
Min. Illumination	0 lux @F1.2
S/N Ratio	more than 48dB
Electronic Shutter	1/50(1/60) - 1/100000 Sec
Flickerless Mode	ON/OFF
Iris Control	Video/DC/Manual
Digital Zoom	N/A
Lens	4~9 mm Vari-Focal Auto Iris Lens
Gamma Correction	0.45
White Balance (AWB)	ON/OFF Selectable
Gain Control (AGC)	ON/OFF Selectable
Back Light Compensation	ON/OFF Selectable
High Light Compensation	Yes
IR	30 LEDs, Upto 30 Mtrs
WDR	Yes
Sync	Internal/External Line Lock
Video Output	1.0 Vp-p/75 ohm
Special Functions	OSD, Camera ID, Camera Title, Mirror, Privacy Masking=8, Motion Detection=4, Sens-Up(Low Shutter)=x256, 2D-DNR, 3D-DNR, LSC, DIS, ECLIPSE
Power Supply	DC 12V ± 5%
Power Consumption	<4W
Dimensions	100mm x 150mm
Weight	900g
Operating Temperature	-10~40 °C
Certifications	CE, FCC, RoHS