


## High Resolution Pin Hole camera with OSD & WDR



### Main Features

- ⇒ 1/3" SONY Super HAD CCD II
- ⇒ High Resolution of 700TVL
- ⇒ Mini. Illumination of 0.001Lux@F1.2
- ⇒ 3.6mm Lens
- ⇒ 2D/3D -DNR, AWB, AGC, BLC, HLC, ATR, MD, Privacy Masking, Picture Adjustment
- ⇒ Powerful OSD Operational Function
- ⇒ CE, FCC and RoHS Certified

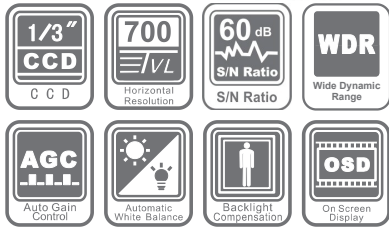

Feature	Specification
Image Sensor	1/3" SONY Super HAD CCD II
Pixels	PAL:960Hx582V, NTSC:967Hx494V
Resolution	700 TVL
Min. Illumination	0.001Lux@F1.2
S/N Ratio	more than 60dB
Electronic Shutter	Auto: 1/50s~1/100,000s Manual: 1/50s, 1/120s, 1/250s, 1/500s, 1/1000s, 1/2000s, 1/4000s, 1/10,000s
Lens	3.6 mm
Focus Mode	Manual
Gamma Correction	0.45
White Balance (AWB)	ATW / Push / User 1 / User 2 / ANTI CR / Manual / Push lock
Gain Control (AGC)	Auto / Manual
Back Light Compensation	ON/OFF Selectable
High Light Compensation	ON/OFF Selectable
WDR	Mode/ Contrast
Sync	Internal
Video Output	1Vp-p Composite Output (75Ω/BNC)
Special Functions	2D/3D -DNR, AWB, AGC, BLC, HLC, ATR, MD, Privacy Masking, Picture Adjustment
Power Supply	DC12V±10%
Power Consumption	Max 2W
Dimensions	30mm x 30mm x 21.7mm
Weight	60g
Operating Temperature	-30°C~+60°C
Certifications	CE, FCC, RoHs