




DS-2CC502/512P(N)(-A) DS-2CC592P(N) Color Dome Camera

- Compact design
- 1/3" Sony CCD
- Day/night with auto switch
- Min. Illumination: 0.1Lux@F1.2, color to B/W auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation

Unit: mm

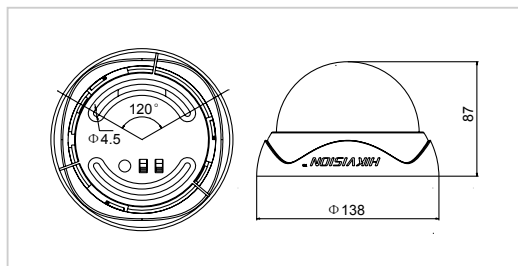

Specifications

		DS-2CC502P(N)(-A)	DS-2CC512P(N)(-A)	DS-2CC592P(N)
Camera	Image Sensor	1/3 " SONY Super HAD CCD		
	Effective Pixels	PAL: 500(H)×582 (V) NTSC: 510(H)×492 (V)	PAL: 752(H)×582 (V) NTSC: 768(H)×494(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL/NTSC		
	Min. Illumination	0.1Lux @ F1.2		
	Electronic Shutter	1/50 (1/60)s~1/100,000s		
	Day&Night	Electronic		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω/BNC)		
	S/N Ratio	More than 48 dB		
Lens	BLC	ON		
	Lens	3.6mm @ F2.0 (2.8mm, 6mm, 8mm, 12mm, 16mm optional)		
General	Power Supply	12VDC, ±10% , (-A) Support 24VAC/12VDC		
	Power Consumption	2W MAX		
	Working Temperature	-10°C~60°C(14°F~140°F)		
	Dimension	Φ138x87mm (Φ5.53"x3.43")		
	Weight	380g (0.83lbs)		

Available Models

DS-2CC502P, DS-2CC502N, DS-2CC502P-A, DS-2CC502N-A, DS-2CC512P, DS-2CC512N, DS-2CC512P-A, DS-2CC512N-A, DS-2CC592P, DS-2CC592N