



## DS-2CC5192P(N)-IR1/IR3 IR Weather-proof Bullet Camera

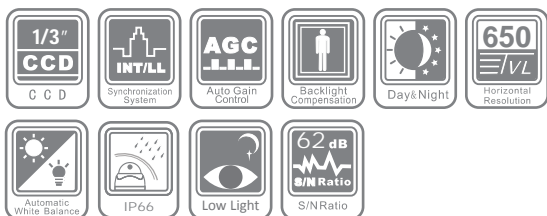

### Key features

- 1/3" SONY Exview HAD CCDII
- 650TVL high resolution
- Super Low illumination: 0.001 Lux @ (F1.2, AGC ON)
- Day/Night with auto switch
- IP66 rating

### Dimensions

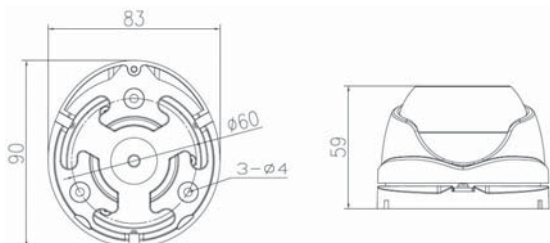

### Specifications

	DS-2CC5192P(N)-IR1	DS-2CC5192P(N)-IR3
<b>Camera</b>		
Image Sensor	1/3" SONY Exview HAD CCD II	
Signal System	PAL / NTSC	
Effective Pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
Min. Illumination	0.001 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.002 Lux @ (F1.8, AGC ON), 0 Lux with IR	
Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s	
Lens	6 mm @ F1.8 (3.6 mm, 2.8 mm optional) Angle of view: 47° (6 mm)	12 mm @ F1.8 (3.6 mm, 6 mm, 8 mm, 16 mm optional) Angle of view: 22.72° (12 mm)
Lens Mount	M12	
Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 75°;	
Day & Night	Electronic	
Horizontal Resolution	650 TVL	
Synchronization	Internal synchronization	
Video Output	1 Vp-p composite output (75 Ω/BNC)	
S/N Ratio	More than 62 dB	
BLC	On	
<b>General</b>		
Operating Conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) Humidity 90% or less (non-condensing)	
Power Supply	12 V DC ± 10%	
Power Consumption	Max. 3 W	Max. 6 W
Weather Proof Rating	IP66	
IR Range	Approx 10 to 20 meters	Approx 30 to 40 meters
Dimensions	89.6 × 59.1 mm (3.53" × 2.33")	Φ 129 × 80.1 mm (Φ 5.08" × 3.15")
Weight	400 g (0.88 lbs)	700 g (1.54 lbs)

### Available models

DS-2CC5192P-IR1, DS-2CC5192P-IR3, DS-2CC5192N-IR1, DS-2CC5192N-IR3