




DS-2CC502/572P(N)-IMB Vandal Proof Color IR Camera

- Compact structure design
- 1/3" SONY CCD
- Day / Night auto switch
- Low illumination: 0.1Lux @ F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation

Unit: mm

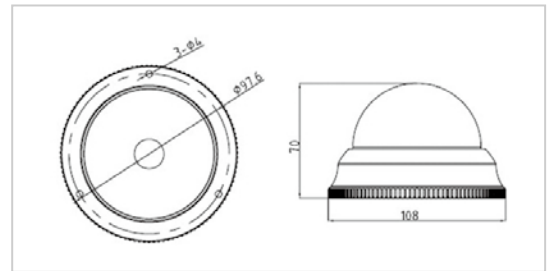

Specifications

	DS-2CC502P(N)-IMB	DS-2CC572P(N)-IMB	
Camera	Image Sensor	1/3 " SONY Super HAD CCD	
	Signal System	PAL/NTSC	
	Effective Pixels	PAL: 500(H)×582(V) NTSC: 510(H)×492(V)	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Min. Illumination	0.1Lux @ F1.2(0 Lux with IR)	
	Electronic Shutter	1/50 (1/60)s~1/100,000s	
	Horizontal Resolution	420TVL	540TVL
	Synchronization	Internal Synchronization	
	Video Output	1Vp-p Composite Output (75Ω/BNC)	
	S/N Ratio	More than 48dB	
Lens	BLC	ON	
	Lens	3.6mm(2.8mm, 6mm optional)	
General	Working Temperature	-10°C~60°C(14°F~140°F)	
	Impact Protection	IEC60068-2-75 test, Eh, 50J; EN50102, up to IK10.	
	Weather Proof	IP66	
	IR Range	Approx 10 to 20 meters (30~60ft)	
	Power Supply	DC 12V±10%	
	Power Consumption	3W MAX	
	Dimension	Φ108x70mm(4.25"x2.76")	
Weight	450g(0.99lbs)		

Available Models

DS-2CC502P-IMB, DS-2CC572P-IMB, DS-2CC502N-IMB, DS-2CC572N-IMB