


DS-7204HVI-S Standalone DVR



Key Features

- Each channel supports up to 4CIF recording and CIF real time recording
- Dual stream
- VGA output
- 1 SATA interface
- Support main and auxiliary video output
- Up to 4-ch synchronous playback

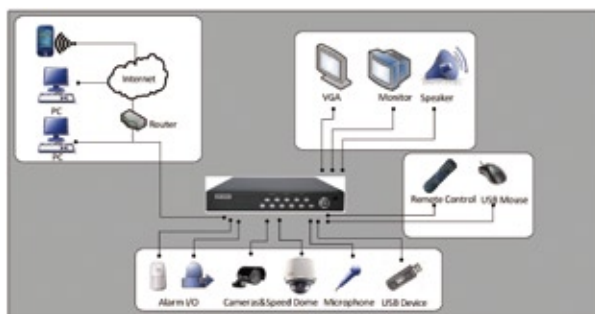

Specifications

		DS-7204HVI-S
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC(1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16Kbps
	Audio input	1-ch
	Audio input interface	RCA (2.0Vp-p, 1KΩ)
Video/Audio output	Voice talk input	1-ch, (Using Audio IN)
	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	VGA output	1 VGA interface can support resolution: 1024*768/60Hz
	Recording resolution	4CIF/DIF/2CIF/DCIF/QCIF
	Video output	1-ch, BNC(1.0Vp-p, 75Ω)
	Video spot out	1-ch, BNC(1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 12fps CIF: 25(P)/30(N) fps
	Stream type	Video/Video&Audio
	Support dual stream	Yes
	Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)
	Audio output	1 channel, RCA (2.0Vp-p, 600Ω)
Hard disk driver	Interface type	1 SATA interface
	Capacity	Up to 2TB capacity
External interface	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface 1 RS-485 interface (T+, T-, R+, R-)
	USB interface	1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W
	Alarm input	4-ch
	Alarm output	1-ch
General	Power supply	12VDC
	Consumption	≤20W (without HDD)
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	315(W)x230(D)x45mm(H)(12.40"(W)x9.06"(D)x1.77"(H))
	Weight(without HDD)	≤2800g(6.17lbs)