


# DH-CVR0404/0804/1604-22

4/8/16 Channel 22" LCD Combo Standalone DVR

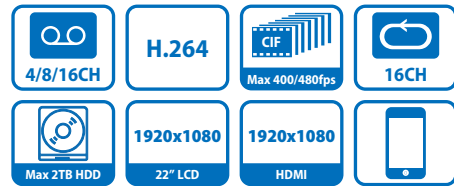

**DH-CVR0404-22:** 4 channel video inputs and 4 channel audio inputs. The 1st video channel can support max 4CIF realtime recording and other channels can support CIF realtime recording. It can support TV, HDMI, and USB2.0. VGA can be used for external PC input.


**DH-CVR0804-22:** 8 channel video inputs and 4 channel audio inputs. The 1st video channel can support max 4CIF realtime recording and other channels can support CIF realtime recording. It can support TV, HDMI, and USB2.0. VGA can be used for external PC input.

**DH-CVR1604-22:** 16 channel video inputs and 4 channel audio inputs. The 1st and 9th videos channel can support max 4CIF realtime recording and other channels can support CIF realtime recording. It can support TV, HDMI, and USB2.0. VGA can be used for external PC input.

## Features

- 4/8/16 channel combo standalone DVR
- Up to 4/8/16 cameras with 1080P(1920×1080) display
- Built-in 22 inch LCD display, it can work as a PC monitor with VGA input
- H.264 video compression algorithm ideal
- Each channel at CIF and special channel at D1 recording
- Dual encoding streams supported
- TV(BNC)/HDMI synchronous video output
- Live, recording, playback, backup & remote access
- 16 channel simultaneous playback
- Smart video detection: MD, camera blank, video loss
- 3D intelligent positioning with DAHUA PTZ dome
- Easy backup: USB devices, network download
- Alarm triggering screen tips, buzzer, PTZ, e-mail, FTP upload
- Supports 1 SATA HDD, 2 USB2.0
- Built-in web server, multi-DVR client, DMSS & CMS

## System Connection

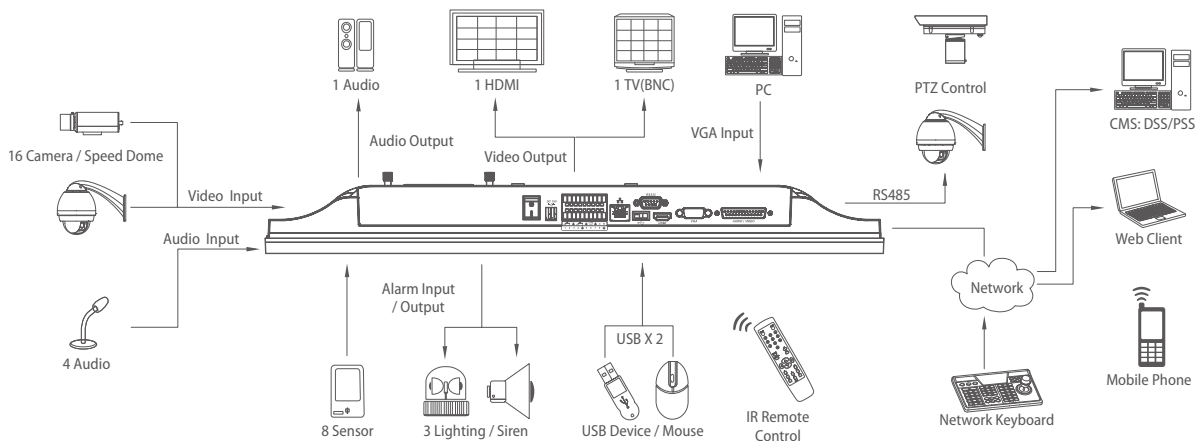

\* Take CVR1604-22 for the example

